

Dabco DMDEE Catalyst CAS110-18-9 Evonik Germany

Overview

Dabco DMDEE is a tertiary amine-based foaming catalyst that facilitates urea (water-isocyanate) reactions in a variety of hard and soft polyurethane foam applications. It is the industry standard foaming catalyst for soft foams and is used in TDI-based soft foam systems such as mattresses, seats, and automobiles. It is also used in combination with trimer catalysts in PIR laminated paperboard formulations. Dabco DMDEE is also available for MDI, TDI/MDI, MDI High Resilience (HR) soft molding foams as well as self-crusting and microcellular systems. It has a shelf life of 36 months.

CAS No.

Dabco DMDEE's CAS number is 110-18-9. This is a unique identifier for Dabco DMDEE that is used to track and identify it throughout the supply chain. The CAS number is also used to search databases and other resources for information about Dabco DMDEE.

Aliases

Dabco DMDEE is also known as 2,2'-Dimorpholinodiethyl ether.

Molecular formula

Dabco DMDEE has the formula C₁₀H₁₇NO₂.

Physical and chemical properties

The physical and chemical properties of Dabco DMDEE are listed in the following table:

Properties	value
Looks	Clear colorless liquid
Scent	Slight ammonia smell
Specific gravity	1.040
Boiling point	200 °C
Flash point	100 °C
Water soluble	Miscible
Solubility in organic solvents	miscibility

Features

Newtop Chemical Materials (Shanghai) Co.,Ltd.

Address: Rm1104 ,No. 258, West SongXing Road, BaoShan District, Shanghai, China.

Mobile Phone: +0086-183 0190 3151 E-mail: info@newtopchem.com www.newtopchem.com

Promotes urea (water-isocyanate) reaction

Used in a variety of hard and soft polyurethane foam applications

Industry standard foaming catalyst for soft foams

For TDI-based soft foam systems, such as mattresses, seats, and automobiles

Used in combination with trimer catalysts in PIR laminated board formulations

Also available in MDI, TDI/MDI, MDI High Resilience (HR) soft molded foams as well as self-crusting and microcellular systems

The shelf life is 36 months

Application

- Soft polyurethane foam
- On-site pouring polyurethane system
- PIR laminated cardboard
- TDI, TDI/MDI, MDI High Resilience (HR) Soft molded foam
- Self-crusting foam
- Microcellular foam


Pros

- Promotes urea (water-isocyanate) reaction

- Used in a variety of hard and soft polyurethane foam applications
- Industry standard foaming catalyst for soft foams
- Can be used in combination with trimer catalysts
- Shelf life is 36 months

shortcoming

- Corrosive to certain metals
- Can have a strong odor
- Combustible

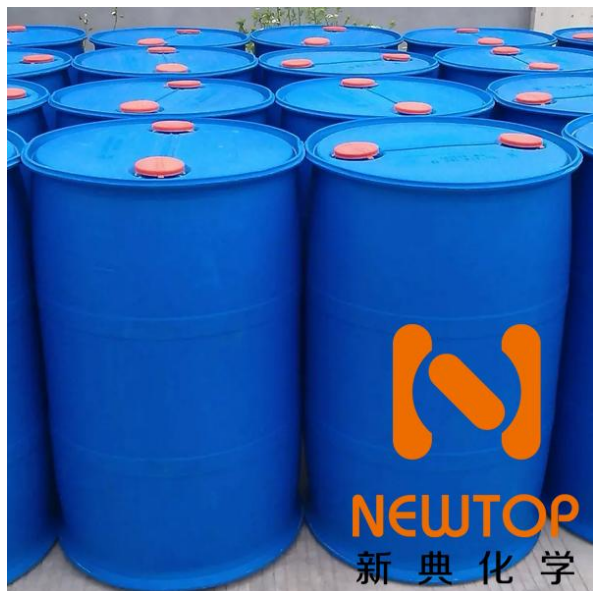

Similarities and differences with similar products

Dabco DMDEE is similar to other tertiary amine-based foaming catalysts in that it promotes a urea (water-isocyanate) reaction. However, it has a number of advantages over other products, including its use in a variety of applications, industry standard status for soft foams, and ability to be combined with trimer catalysts.

Precautions for Use

- Wear gloves and safety goggles when handling Dabco DMDEE.
- Avoid contact with skin and eyes.
- Keep away from heat sources and open flames.
- Store in a cool, dry place.
- Dispose of it properly according to local regulations.

Shelf life:

Remain unopened for two years

Storage and Transportation:

Should be sealed, stored in a dry cool ventilated warehouse

Packaging:

200KG/ barrel storage: It is recommended to store in a dry and cool area with proper ventilation. After the original packaging, please fasten the packaging cover as soon as

possible to prevent moisture and other substances from mixing and affecting the product performance. Do not inhale dust and avoid contact between skin and mucous membrane. Smoking, eating and drinking are prohibited in the workplace. Shower and change after work. Store contaminated clothes separately and use them after washing. Practice good hygiene.

Technical support and business contacts E-mail: info@newtopchem.com